
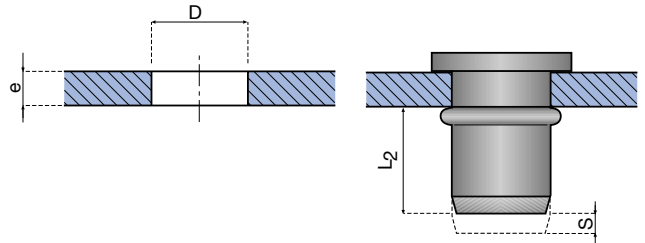


RIVKLE® Aluminium blind rivet nuts

Round body, plain, flat head

Types 233 00 open and 233 20 closed

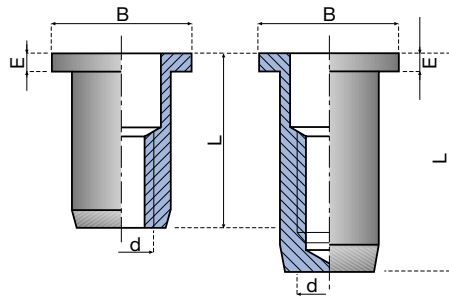

Advantages:

- high crimping force
- lightweight
- high corrosion resistance
- screw length can be varied (open end)
- splash-proof (closed end)

d	Thickness e	Hole D ^{+01%}	B	E	S*	L	Open B 70 102			Closed B 70 102		
							L ₂ *	Product code	L	L ₂ *	Product code	
M3	0.25 – 2.0	5	7.5	1.0	S = 3-e	9.6	5.4	2330 003 0020	13.5	9.3	2332 003 0020	
	2.0 – 3.5	5	7.5	1.0	S = 4.5-e	11.2	5.4	2330 003 0035	15.1	9.3	2332 003 0035	
M4	0.25 – 2.5	6	9.0	1.0	S = 4.1-e	11.0	6.3	2330 004 0025	16.0	11.3	2332 004 0025	
	2.5 – 4.5	6	9.0	1.0	S = 6.1-e	13.1	6.3	2330 004 0045	18.1	11.3	2332 004 0045	
M5	0.25 – 3.0	7	10.0	1.0	S = 4.5-e	13.6	7.8	2330 005 0030	19.3	13.5	2332 005 0030	
	3.0 – 5.5	7	10.0	1.0	S = 7-e	16.2	7.8	2330 005 0055	21.9	13.5	2332 005 0055	
M6	0.5 – 3.0	9	13.0	1.5	S = 5-e	16.6	10.4	2330 006 0030	23.6	17.4	2332 006 0030	
	3.0 – 5.5	9	13.0	1.5	S = 7.5-e	19.3	10.4	2330 006 0055	26.3	17.4	2332 006 0055	
M8	0.5 – 3.0	11	16.0	1.5	S = 6-e	20.0	12.7	2330 008 0030	28.3	21.0	2332 008 0030	
	3.0 – 5.5	11	16.0	1.5	S = 8.5-e	22.7	12.7	2330 008 0055	31.0	21.0	2332 008 0055	
M10	0.8 – 3.5	13	19.0	2.0	S = 6.5-e	25.0	16.6	2330 010 0035	34.9	26.5	2332 010 0035	
	3.5 – 6.0	13	19.0	2.0	S = 9-e	27.7	16.6	2330 010 0060	37.6	26.5	2332 010 0060	
M12	0.5 – 1.5	16	23.0	2.0	S = 4.5-e	26.2	20.0	2330 012 0150	37.7	31.5	2332 012 0150	
	1.5 – 3.0	16	23.0	2.0	S = 6-e	27.8	20.0	2330 012 0300	39.3	31.5	2332 012 0300	
	3.0 – 4.5	16	23.0	2.0	S = 7.5-e	29.4	20.0	2330 012 0450	40.9	31.5	2332 012 0450	
	4.5 – 6.0	16	23.0	2.0	S = 9-e	31.0	20.0	2330 012 0600	42.5	31.5	2332 012 0600	

* Dimensions S and L₂ are indicative values. the difference in length S depends on the material thickness and is used as the setting tool stroke. Dimensions in mm.

Other dimensions and variants can be supplied on request.

Sales@RivetNutUSA.com

ISO 9001 CERTIFIED
www.RivetNutUSA.com

(800) 236-3200