


RIVETKING® ABS-CT™ SERIES • “CRIMP STYLE” • MULTIGRIP-CT™

RIVET: 5056 ALUMINUM • MANDREL: STEEL TRIVALENT ZINC PLATED

SPECIAL BLIND RIVETS

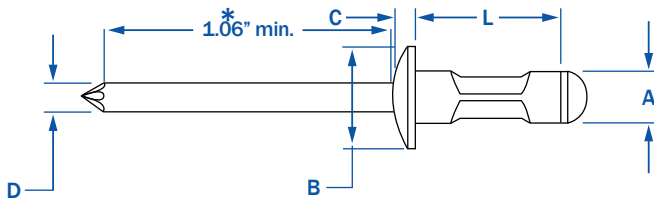

The benefit of a MultiGrip™ is that they offer a wider grip range than traditional blind rivets assisting the users in inventory reduction and part consolidation efforts. The CT series has excellent hole fill ability and strength as compared to Standard Blind Rivets and RT series MultiGrips™. TS-16949 produced and when applicable on steel, trivalent zinc plated for ROHS and GMW3044 compliance.



RIVET: ALUMINUM
MANDREL: STEEL TRIVALENT ZINC PLATED



HEAD STYLE	PART NUMBER	RIVET SIZE	A		L		B		C		D	
			GRIP RANGE	LENGTH	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	SHEAR	TENSILE		
			MIN. - MAX.	MAX	NOM.	NOM.	NOM.	MIN. - MAX.	TYPICAL LBS.F	TYPICAL LBS.F		
DOME HEAD	ABS - 41 - 43MG	1/8"	.020 - .187	.315	.250	.037	.057	.129 - .138	165	230		
	ABS - 42 - 44MG		.046 - .250	.375								
	ABS - 43 - 45MG		.156 - .312	.438								
	ABS - 45 - 46MG		.216 - .375	.500								
	ABS - 51 - 52MG	5/32"	.020 - .156	.270	.312	.047	.086	.161 - .169	255	375		
	ABS - 52 - 54MG		.040 - .250	.375								
	ABS - 54 - 56MG		.156 - .375	.500								
	ABS - 56 - 58MG		.250 - .500	.666								
	ABS - 62 - 64MG	3/16"	.062 - .250	.406	.386	.057	.108	.192 - .200	350	530		
	ABS - 63 - 67MG		.187 - .437	.595								
	ABS - 66 - 68MG		.250 - .500	.666								
	ABS - 68 - 610MG		.330 - .625	.760								
	ABS - 610 - 612MG		.500 - .750	.978								
	ABS - 82 - 84MG	1/4"	.062 - .250	.472	.511	.070	.141	.257 - .261	630	900		
	ABS - 84 - 86MG		.156 - .375	.590								
ABS - 86 - 88MG	.250 - .750		.708									
LARGE FLANGE	ABS - 42 - 43LFMG	1/8"	.031 - .187	.315	.325	.039	.057	.129 - .138	165	230		
	ABS - 42 - 44LFMG		.046 - .250	.375								
	ABS - 44 - 45LFMG		.156 - .312	.438								
	ABS - 52 - 54LFMG	5/32"	.062 - .250	.375	.375	.051	.086	.161 - .169	255	375		
	ABS - 53 - 55LFMG		.125 - .312	.438								
	ABS - 55 - 58LFMG		.251 - .500	.690								
	ABS - 62 - 64LFMG	3/16"	.062 - .250	.406	.625	.069	.108	.192 - .200	350	530		
	ABS - 66 - 68LFMG		.250 - .500	.666								
ABS - 610 - 612LFMG	.500 - .781		.978									
C'SUNK	ACS - 43 - 44MG	1/8"	.093 - .250	.383	.209	.029	.057	.129 - .138	165	230		
	ACS - 53 - 55MG	5/32"	.110 - .312	.470	.252	.049	.086	.161 - .169	255	375		
	ACS - 62 - 65MG	3/16"	.062 - .312	.500	.345	.051	.108	.192 - .200	350	530		
	ACS - 66 - 68MG		.250 - .500	.690								

*1/4" Diameter rivets have a 1.250 mandrel length minimum.

STAINLESS STEEL MULTIGRIP-CT™ ARE AVAILABLE, SEE RIVETKING® RIVEX®, ON PAGE 32.

