


# RIVETKING® SBS-CE SERIES • ALL STEEL • CLOSED END

ALL STEEL • DOME HEAD • CLOSED END BLIND RIVETS

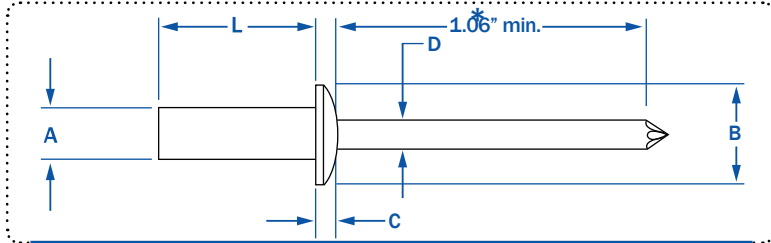

RIVET: DOME HEAD, ZINC PLATED, C-1002 STEEL  
 MANDREL: ZINC PLATED, STEEL  
 Per IFI-126 Grade 30

Closed End Rivets are used when a weather proof / leak proof seal is needed. Its completely closed end design prevents liquids, moisture, air and other contaminants from entering the riveted hole and/or the rivet itself. The RivetKing® Closed End Rivet design guarantees the mandrel head is fully retained within the rivet. Steel/Steel Closed End rivets are trivalent zinc plated.

FOR SUPERIOR CORROSION PROTECTION USE ABA-CE OR FBF-CE.



PART NUMBER	A	GRIP RANGE MIN - MAX	L	B	C	D	HOLE SIZE MIN - MAX	SHEAR LBS.F	TENSILE LBS.F
	RIVET SIZE		LENGTH MAX	HEAD DIA NOM.	HEAD HEIGHT NOM.	MANDREL DIA NOM.			
SBS - 42 - CE	1/8"	.063 - .125	.360	.250	.040	.076	129 - .133 (#30)	240	270
SBS - 43 - CE		.126 - .187	.422						
SBS - 44 - CE		.188 - .250	.485						
SBS - 45 - CE		.251 - .312	.547						
SBS - 46 - CE		.313 - .375	.610						
SBS - 48 - CE		.376 - .500	.735						
SBS - 52 - CE	5/32"	.020 - .125	.375	.312	.050	.095	.160 - .164 (#20)	390	420
SBS - 53 - CE		.126 - .187	.437						
SBS - 54 - CE		.188 - .250	.500						
SBS - 56 - CE		.251 - .375	.562						
SBS - 58 - CE		.376 - .500	.625						
SBS - 510 - CE	.501 - .625	.750							
SBS - 62 - CE	3/16"	.020 - .125	.406	.375	.060	.114	.192 - .196 (#11)	550	640
SBS - 63 - CE		.126 - .187	.468						
SBS - 64 - CE		.188 - .250	.531						
SBS - 66 - CE		.251 - .375	.656						
SBS - 68 - CE		.376 - .500	.781						
SBS - 610 - CE		.501 - .625	.906						
SBS - 612 - CE	.626 - .750	1.026							



3/32" and 1/4" Diameter Rivets can be quoted on request.

