

Exceptional Customer Service

Same Day **Shipping**

Easy **Fastening** Solutions

Repair & Service Tools / Rentals

Tools & Parts In Stock

ONSERT®

Quick and process-reliable bonding of fastening elements with light-curing adhesives

BOLLHOFF



You want to join glass components or glass displays? You need attachment points on fibre-reinforced plastics? Extreme sealing or corrosion requirements imply further challenges to consider.

The potential joining process should furthermore present robust results and be suited for manual as well as completely integrated use - and all of that within seconds.

Your solution: The ONSERT® adhesive technology

Quick joining of fasteners using light-curing adhesives with high process reliability.

ONSERT® studs



ONSERT® for cable management



Basically, all geometries which can be produced in injection moulding are possible: screw joints on engineering plastic parts, detachable and non-detachable snap connections, bondable ball studs, etc. can be applied to materials such as CFRP, GRP, glass, paint, cathodic dip coating surfaces, plastics or metals.

You also benefit from our optimised system approach: We offer processing with manual, battery-powered tools and even completely integrated robot applications.

Convince yourself.

ONSERT® inserts





BOLLHOFF

Table of contents

ONSERT® Spotlight	2
ONSERT® Technology – An efficient joint Your advantages	
Product variants	6
Adhesives	8
Joining process	9
Processing systems	10
Technical data . Product tables . Good2Know – Technical base data .	13
ONSERT® Industries and scope of application Main fields of application – Material-related perspective. Success stories	20
The Böllhoff competencies	25
InfoPoint	26



Our InfoPoint provides additional information in the form of further brochures and/or videos at the end of this brochure.

An efficient joint

The ONSERT® technology allows the quick bonding of fasteners on diverse materials using light-curing adhesives with high process reliability.

For the curing light to reach the adhesive, the ONSERT® fasteners are made from transparent plastic or from metal with a transparent plastic overmoulding.

The focus is on the short cycle times, the material-friendly process as well as the flexibility with respect to fasteners and method.





Your advantages

- Sophisticated appearance for design and visible surfaces (customer parts) no breakthrough or rear projection
- Fastening elements do not become apparent on the visible side through heat input such as it happens during welding
- Strong joint immediately after exposure (no post-crosslinking)
- Short curing times (< 5 seconds possible)</p>
- Bonding of joining points, also after measures for corrosion protection (e.g. on cathodic dip coating paint)
- Outstanding corrosion properties (no contact corrosion)

As already mentioned, basically all geometries which can be produced in injection moulding are possible for the ONSERT® adhesive technology. Fasteners such as screws, threaded bushes, snap connections, etc. are provided with a transparent plastic overmoulding. The geometry provides for sufficient bonding surface. ONSERT® fasteners can be applied to materials such as CFRP, GRP, glass, paint, cathodic dip coating surfaces, plastics or metals.

Explore our different ONSERT® variants:

Plastic-metal hybrid versions

There are fields of use where full plastic components cannot withstand the application of high local loads, for example in metric screw joints. In such cases metal fasteners are moulded in plastics to combine the advantages of plastics and metal.

ONSERT® studs

- Engineering plastic part with steel or A286 (aviation) threaded bolt
- 10-32 UNF threads available in different lengths
- Alternative for studs and spacers with two-component adhesive



ONSERT® insert

- Engineering plastic part with thread insert metric or imperial thread
- Engineering plastic part with HITSERT® Screwlock
- Insertion into plate material (no potting)
- Alternative for inserts acc. to NAS 1832-1836 and others



Pull plastic version

ONSERT® Smart

If requirements allow, full plastic fasteners are used. This increases the freedom of design and also positively affects the adhesive curing time. Moreover, in most cases full plastic components can be produced more economically.

Modular version

A bottom part to join a variety of top parts with different functions

One-piece version

■ A function, e.g. ONSERT® Smart for cable management




3 ONSERT® specials

Your initial conceptional ideas are the starting signal to develop tailor-made solutions. Special design requirements, hybrid joints or mounting elements - benefit from our know-how.

The earlier we can contribute our competence, the greater the potential.



ONSERT® Adhesives

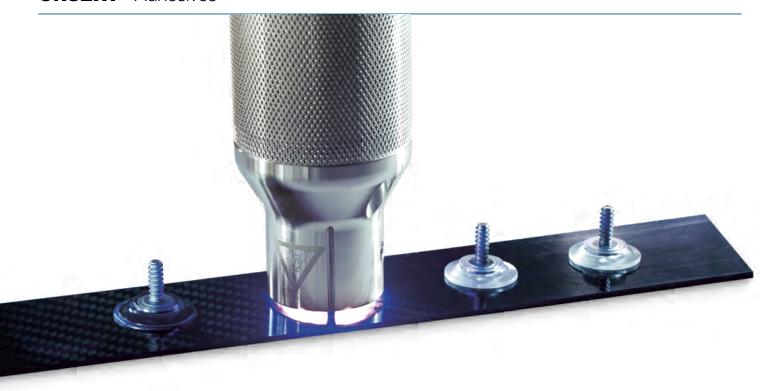

DELO is a leading manufacturer of industrial adhesives. For 60 years, the owneroperated company has been offering tailor-made special adhesives and device systems for applications in high-tech industries – from the automotive industry and aviation to optoelectronics to the electronics industry.

From DELO's adhesive portfolio, we decided to use the DELO PHOTOBOND product family. It cures within seconds when exposed to appropriate light and is well-suited for ONSERT® bonding. Since DELO and Böllhoff cooperate closely, the adhesive can be perfectly processed in combination with ONSERT® fasteners.

Properties of DELO PHOTOBOND:

- Light-curing acrylate
- Universal adhesive on different substrates
- Application-specific mechanical properties (elongation at break, TG, Young's modulus)

With the ONSERT® method, the adhesive cures perfectly because the translucent fasteners transmit the light.

The provided standard adhesive portfolio already covers a wide range of potential applications. Beyond those, customer-specific solutions can also be realised. We are happy to accompany and support you through your development process.

- Fibre-reinforced plastics: CFRP, GRP
- Glass, also painted and printed
- Plastics such as PBT, ABS or blends
- Metals



Process description


The joining process comprises only a few steps. They are illustrated below with the example of the ONSERT® Smart stud:




Feed of the ONSERT® fastener



Application of the one-component adhesive



Touching the tool to the substrate



Exposure



Stable joint

Detailed information about the respective bonding process and amount of adhesive is also provided in our "Technical Manual ONSERT®". Do not hesitate to contact us.

ONSERT® Processing systems – **ONSERT®** Portable Mini



The innovative battery tool for manual bonding

The first step into the ONSERT® process technology is with the Portable Mini, which is ideal for prototypes, small series and repairs.

Your advantages ■ Small and easy to use ■ Exchange units for different ONSERT® fasteners allow an easy adaptation of the setting tool to different fasteners Process control mechanisms for a safe use USB interface for tool setup and definition of process parameters

Delivery scope

- ONSERT® Portable Mini setting tool
- Control unit
- Battery and charger
- Exchange unit for M5/D5 and M6/D6
- Attachment for light intensity meter DELOLUXcontrol
- Dosing gun for 30-ml Semco® cartridges
- UV goggles
- USB stick with ONSERT® software
- USB cable



Application of adhesive with adhesive dispenser from 600-cc cartridge


If the numbers of pieces are larger and costs must be reduced, adhesive can be applied from big cartridges by means of volumetric application technology.

Another option to apply the adhesive is the use of 600-ml cartridges (20 oz). For those devices, an adhesive dosing system is required. The motives to use 600-ml cartridges are the reduced adhesive price, more precise dosing, more comfortable and faster processing as well as a more robust process in general.


The main components of the device are the mechanical extrusion for the adhesive cartridge 1, the control system for the adhesive dispenser 2 and the adhesive dispenser 3.

system, in which case the adhesive does not need to be applied with a handgun. Instead, the ONSERT® Portable Mini is positioned with the bolt centred below the dispenser tip and automatic adhesive extrusion started by pushing down the foot pedal switch.



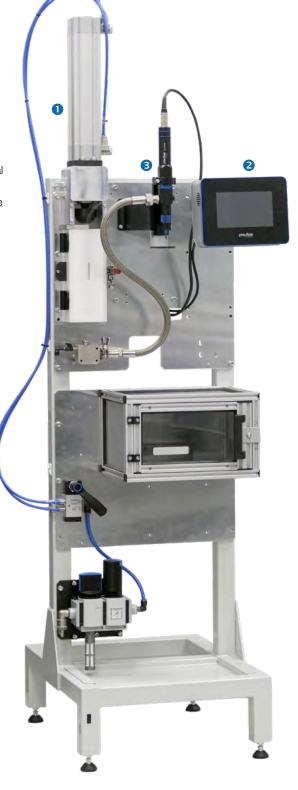

Sales@RivetNutUSA.com

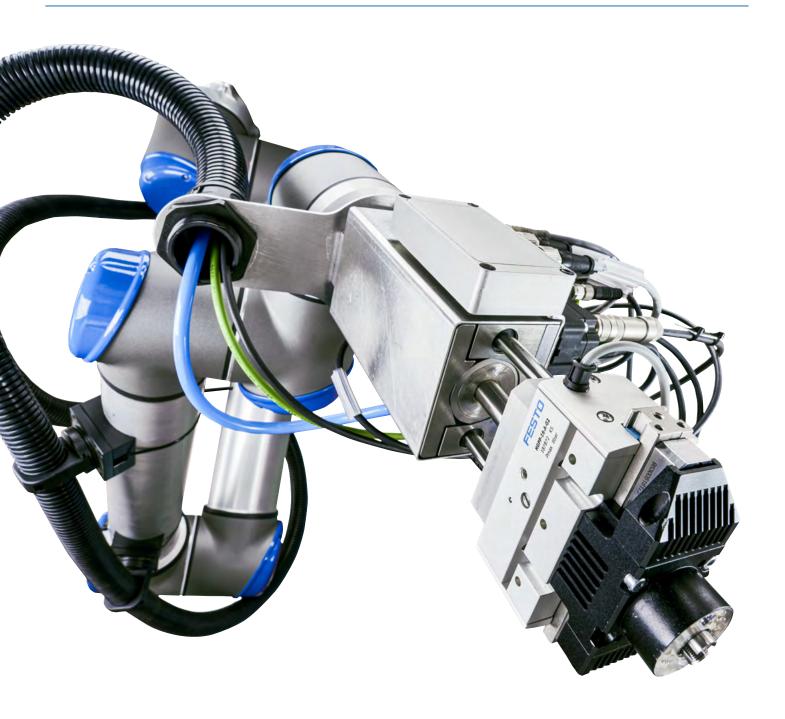


The most extensive expansion stage of automation is the ONSERT® pick-and-apply system. In combination with the application of adhesive it is an expansion and can be fully integrated into robot-controlled processing cells.

Your advantages

- Processing of fastening elements in pick-and-apply mode
- Flexible adaptation to a new component geometry and workstation (e.g. if using cobots)
- The robot can bond most diverse fastening elements (bolt diameter from 4 mm to 6 mm, bolt length from 10 mm to 50 mm)
- Nuts and special fasteners can be bonded if the gripper jaws are exchanged
- Employing the latest LED technology, curing times as short as 1.5 seconds can be realised

Sales@RivetNutUSA.com


ONSERT® studs




Item code	Thread	D	н	L	Material	Surface
48301040024	M4	25	5.5	8	steel	ZiNi
48301040025	M4	25	5.5	12	steel	ZiNi
48301050026	M5	25	5.5	10	steel	ZiNi
48301050027	M5	25	5.5	15	steel	ZiNi
48301060028	M6	25	5.5	12	steel	ZiNi
48301060029	M6	25	5.5	18	steel	ZiNi
48402211010	10-32	25	5.5	10	A286	passivated*
48402211015	10-32	25	5.5	15	A286	passivated*
48402211020	10-32	25	5.5	20	A286	passivated*
48402211025	10-32	25	5.5	25	A286	passivated*

^{*}ASM2700

ONSERT® Smart for cable management





Item code	Passage B	D	н	Material
48409100002	9.5	25	10	PAPACM12
48409100003	9.5	25	6	PAPACM12

Plastic-metal hybrid versions

ONSERT® studs

Materials

- Plastic overmoulding
 - → PA PACM 12



- Metal fastener ¹)
 - → Steel with zinc-nickel coating, sizes M5 and M6
 - → Alloy A286 (passivated, 0.1900-32)



ONSERT® inserts

Materials

- Plastic overmoulding
 - → PA PACM 12



1) Others on request

- Metal fastener¹)
 - → Alloy EN AW-6061-T6 with X5CrNi18-10HC (1.4301, 0.1900-32)
 - → Alternative: brass



Sales@RivetNutUSA.com

Full plastic versions

ONSERT® for cable management

Materials



Materials

- **Plastics** bottom part
 - → PA PACM 12

Top part 1)

- → PEI
- \rightarrow PA



ONSERT® specials

Materials

- Plastics
 - → PA PACM 12





Information about the adhesive

Adhesive

- One-component acrylate (modified)
- Compliant with RoHS Directive 2017/2102/EU
- Fast curing full strength within seconds
- Compliant with FAR 25 and ANSI/UL 94

Advantages

- Fast curing and immediate strength
- No visual impairment of sensitive surfaces
- Suited if thermal methods cannot be used
- One-component adhesive adhesives are not mixed
- Manual and automated processing systems available

Restrictions

- Constant ambient temperature < 90 °C</p>
- For metals: AL, steel after electrostatic painting or paint coating
- For plastics: epoxy composite materials, PC, PA
- For glass: with or without paint coating

ISO 9001 CERTIFIED www.RivetNutUSA.com

(800) 236-3200

¹⁾ Others on request

ONSERT® Good2Know – Technical data ONSERT® studs



Parameters

Product type	ONSERT® stud
Item code	4840 221 1020
Plastic overmoulding	PA PACM 12
Metal fastener	alloy A286
Surface	passivated
Adhesive	4839 100 4150
Amount	0.25 g
Tool	Portable Mini, 8 sec., 90 %
Substrate	aluminium
Surface	sanded
Thickness	4 mm



Typical type of failure



	4.0									
ΈΝ]	3.5		I T							der
ance	3.0			T				I	I	firmed und conditions
Pull-off and shear performance [kN]	2.5	T						-	- I	Properties to be confirmed under customer-specific conditions
r per	2.0					I				operties to be cont customer-specific
shea	1.5						I I			to be r-spe
and	1.0									rties
Ho-III	0.5									rope
ፈ	0.0	-70 °C	- 40 °C	0°C	RT	55 °C	90 °C	VDA*	85/85**	_
	* alterna	ting climate	** constant clima	ate						


Further properties*

Salt spray tests	-
Static load	5 kg over 90 days at 90 °C
Stripping torque	>11 Nm

* Not all properties apply to all available

- Dynamic test acc. to RTCA-DO 160F Ch. 8 200 g
- Dynamic test acc. to RTCA-DO 160F Ch. 7 200 g
- Imbalance tests/nose wheel acc. to ABD 0100.1.2 200 g
- Media resistance acc. to DO 160 G Sec. 11.4
- Burning behaviour during 60 seconds, vertical acc. to FAR 25 (materials)

Load case

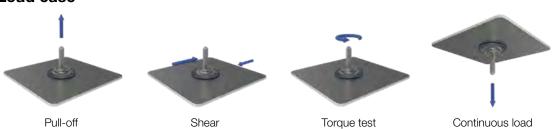

Sales@RivetNutUSA.com

(800) 236-3200

ONSERT® Good2Know - Technical data ONSERT® for cable management





Parameters

Product type	ONSERT® for cable management
Item code	4840 910 0002
Plastic overmoulding	PA PACM 12
Metal fastener	-
Surface	-
Adhesive	4839 100 4150
Amount	0.25 g
Tool	Portable Mini, 8 sec., 90 %
Substrate	aluminium
Surface	sanded
Thickness	4 mm



Typical type of failure



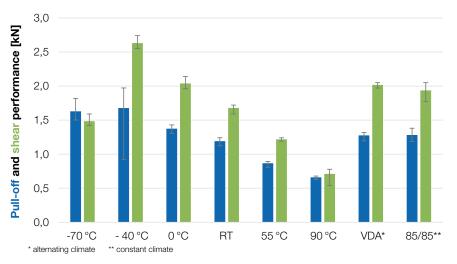

Properties to be confirmed under customer-specific conditions

Further properties*

Salt spray tests	-
Static load	_
Stripping torque	-

* Not all characteristics apply to all combinations available

- Dynamic test acc. to RTCA-DO 160F Ch. 8 200 g
- Dynamic test acc. to RTCA-DO 160F Ch. 7 200 g
- Imbalance tests/nose wheel acc. to ABD 0100.1.2 200 g
- Media resistance acc. to DO 160 G Sec. 11.4
- Burning behaviour during 60 seconds, vertical acc. to FAR 25 (materials)


Load case




Sales@RivetNutUSA.com

(800) 236-3200

The innovative joining process provides ideal conditions for diverse applications in most different industries. Within the framework of a project, new developments according to your application-specific requirements can also be realised at any time. We incorporate your precise concepts and ideas to be able to offer you the best solution for your application.

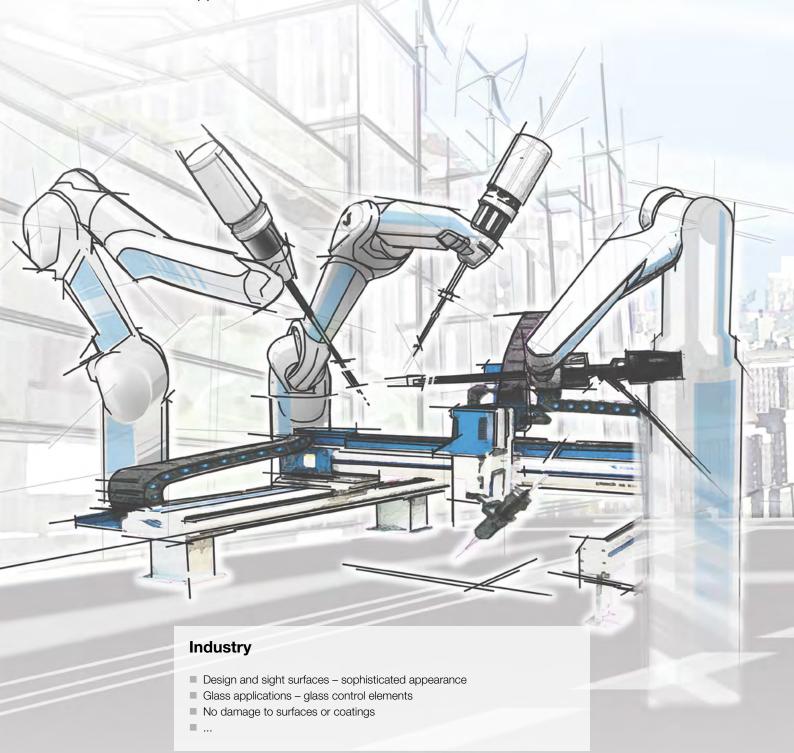


Sales@RivetNutUSA.com

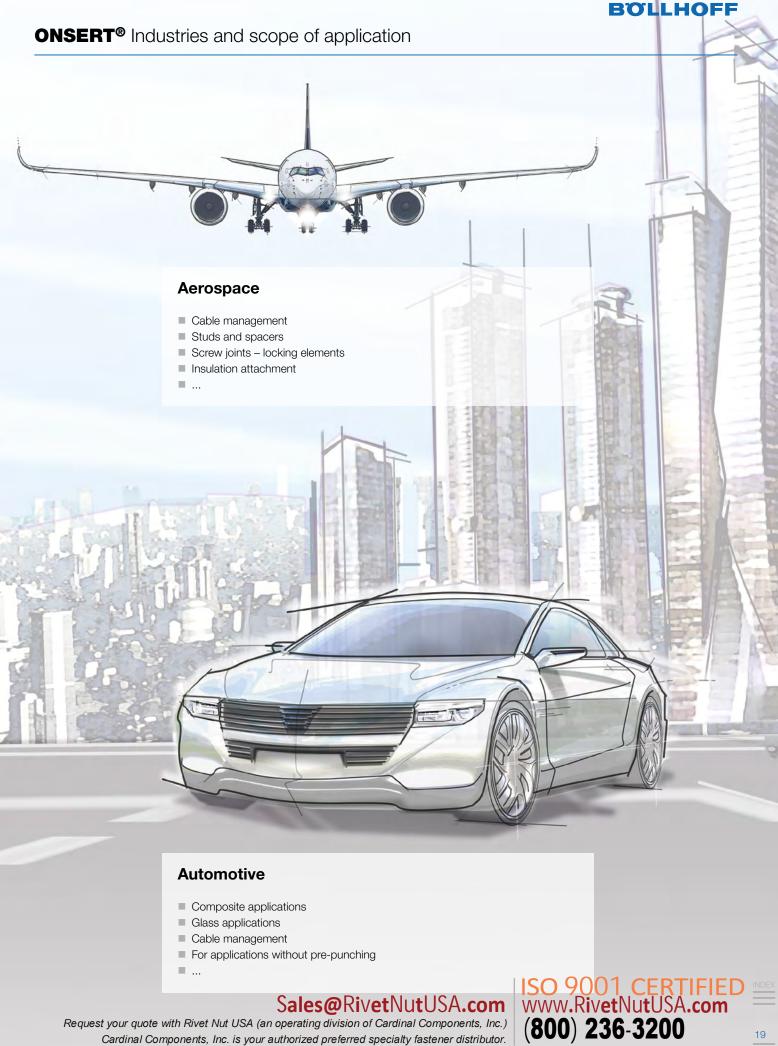



ONSERT® for composite applications

- No holes, no damage to the fibre structure
- No mechanical or thermal load on the substrate
- Very good corrosion behaviour (no contact corrosion)

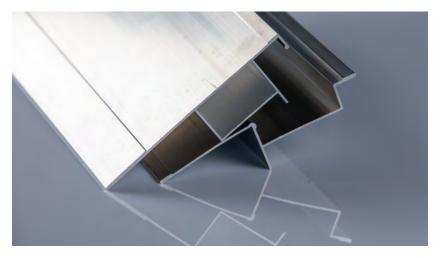

ONSERT® for profile applications (e.g. battery packs)

- 100 % tight, through avoidance of holes
- No thermal load, no deformation
- Steel thread on aluminium sheet possible
- Very good corrosion behaviour
- No thermal damage to the joining zone



ONSERT® for glass applications

- No application of stress due to a flexible adhesive system
- Extremely simple processing compared to tapes, 2C or thermosetting adhesive systems
- Detachable joints instead of structural bonds



ONSERT® for high-quality surfaces

- No standout not even on thin sheets (e.g. 0.6 mm steel)
- No deformation or heat input in sheet materials
- Suited also for finished surfaces
- Fast and integrable process



These are examples of the good cooperation with our customers.

ONSERT® flies business class

Aiming at reducing the weight of business class seats CL6720 and making processes more efficient, RECARO Aircraft Seating worked together with joining technology expert Böllhoff and DELO Industrie Klebstoffe to create a solution based on the ONSERT® method.



for cable management





ONSERT® Smart for cable management

ONSERT® Success stories



Sales@RivetNutUSA.com

ISO 9001 CERTIFIED www.RivetNutUSA.com (800) 236-3200



Your partner to succeed in joining

- and what that means for you:

Development and design competencies

- Committed experts for innovation, product, project and design management
- Trend scouting
- Design thinking
- FMFA
- Feasibility studies
- Activities in R & D (FEM, Moldflow analysis)
- Diverse CAD softwares, e.g. Catia V5, Ansys, Creo Parametric
- Customer-specific developments
- Application engineering and engineering consulting
- Prototyping and additive manufacturing
- Value stream mapping, e.g. cost optimisation
- Certified laboratory acc. to DIN EN ISO/IEC 17025

Production

- Technical production know-how
- Fourteen modern production facilities worldwide
- Main production technologies
 - Injection moulding
 - Cold and hot forming
 - Turning and milling processes
 - Thread rolling
 - Wire profiling and winding
 - Surface treatment (passivation, cadmium plating, silver coating)
 - Mechanical and plant engineering
- Zero-defect concept
- Well-trained production personnel and continuous internal training
- Company training centre

Qualification

- Quality management systems requirements for
 - aviation, space and defence organisations (EN 9100) and
 - the automotive industry (IATF 16949)
- DIN EN 9145 Requirements for Advanced Product Quality Planning (APQP) and Production Part Approval Process (PPAP)
- FAIR acc. to EN 9102
- Certified laboratory acc. to DIN EN ISO/IEC 17025
- Environmental management acc. to DIN EN ISO 14001
- Energy management systems acc. to DIN EN ISO 50001
- Occupational health and safety management systems acc. to DIN ISO 45001 (replaces OHSAS 18001)
- Product qualification for customers and third parties

Supply

- Supply solutions
- Worldwide network within the Group
- Large warehouses in France, Germany and Great Britain
- Proximity to customers thanks to global presence
- After-sales service
- Repair kits available
- eShop
- Customised packaging



Catalogues

Product catalogues









ONSERT®

Quick and process-reliable bonding of fastening elements with lightcuring adhesives Catalogue No 0250

https://www.boellhoff.com/en/pdf/onsert

Product Guide

360° Joining Technology Catalogue No 1190

https://www.boellhoff.com/en/pdf/product-guide

Industry-specific catalogues









Aerospace industry meets 360° Joining Technology

Catalogue No 0951

https://www.boellhoff.com/en/pdf/aerospace

E-mobility meets 360° Joining Technology

Catalogue No 8024

https://www.boellhoff.com/en/pdf/e-mobility

Success stories













ONSERT® flies business class

Catalogue No 0342

https://www.boellhoff.com/en/pdf/success-story/recaro

kessler systems and Böllhoff create points of contact

Catalogue No 0332

https://www.boellhoff.com/en/pdf/success-story/kessler

ONSERT® adhesive technology

Good2Know cards

https://www.boellhoff.com/en/good2know/onsert



Videos

Fasteners and processing systems









ONSERT® studs

Quick and process-reliable bonding of fastening elements with lightcuring adhesives

https://www.boellhoff.com/video/onsert-stud

ONSERT® insert

Quick and process-reliable bonding of fastening elements with lightcuring adhesives

https://www.boellhoff.com/video/onsert







ONSERT® Portable Mini

Battery-powered manual assembly tool for bonding ONSERT® fasteners

https://www.boellhoff.com/video/onsert-portable-mini

ONSERT®

Bonding of fasteners using a collaborative robot

https://www.boellhoff.com/video/onsert-automation

Industry-specific videos







Sales@RivetNutUSA.com







360° Joining Technology meets automotive engineering

https://www.boellhoff.com/video/automotive

360° Joining Technology meets e-mobility

Aerospace industry meets 360° Joining Technology

https://www.boellhoff.com/video/e-mobility

https://www.boellhoff.com/video/aerospace

Good2Know videos





https://www.boellhoff.com/videos/en/good2know/onsert

ONSERT® adhesive technology

BOLLHOFF

Passion for successful joining.

Böllhoff Group

Innovative partner for joining technology with assembly and logistics solutions.

Find your local partner at www.boellhoff.com or contact us at fat@boellhoff.com.

Subject to technical change. Reprinting, even in extract form, only permitted with express consent. Observe protective note according to ISO 16016.



0250/23-V1-EN (WBH)